

SETTING UP PRESETS INTO GROUP

In this example we are using PTC-TP-1500 or 3000.

1A) CALL + 95 + ENTER → Opens PTZ MENU

1B) SELECT "DOME CAMERA SETUP" then press NEAR



2A) SELECT "PRESET SETUP" then NEAR



3A) SELECT "PRESET NO." → NEAR → Choose "1" → NEAR

3B) SELECT "EDIT SCENE" → NEAR




4A) Move the PTZ to the first spot then press NEAR to SAVE.



5A) SELECT "PRESET NO." → NEAR → Choose "2" → NEAR

5B) SELECT "EDIT SCENE" → NEAR

5C) Move the PTZ to the second spot then press NEAR to SAVE

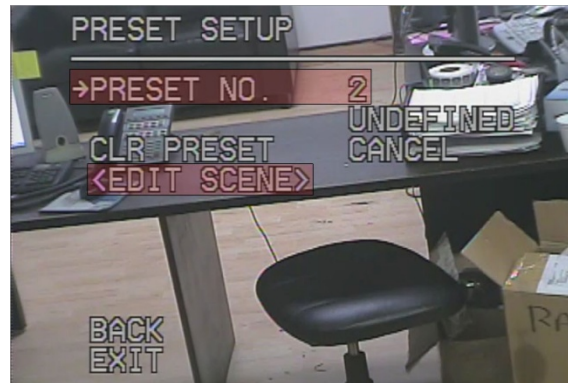


7A) SELECT "GROUP SETUP" → NEAR



8A) SELECT "GROUP NO." → NEAR → Choose "1" → NEAR

8B) SELECT "EDIT GROUP" → NEAR

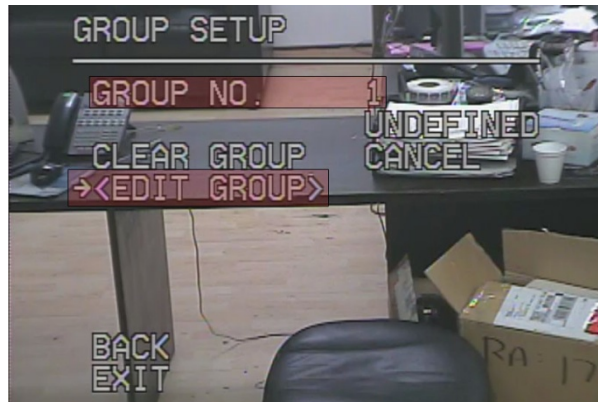

9A) NEAR (If arrow mark is on "NO – ACTION – ### – DWELL – OPT")

9B) SELECT "1" under "NO" → NEAR → Choose "PRESET" under "ACTION" → Choose "1" under "###" → NEAR

9C) SELECT "2" under "NO" → NEAR → Choose "PRESET" under "ACTION" → Choose "2" under "###" → NEAR

9D) FAR → SELECT "SAVE" → NEAR



- EXIT from PTZ MENU
- Press CALL+151+ENTER to rotate from PRESET1 to PRESET2 automatically.

NOTE: You can add in the group PRESET, SWING, and PATTERN at the same time.