


FINGERPRINT DOORLOCK INSTALLATION GIUDE (VIRDI 450FP)

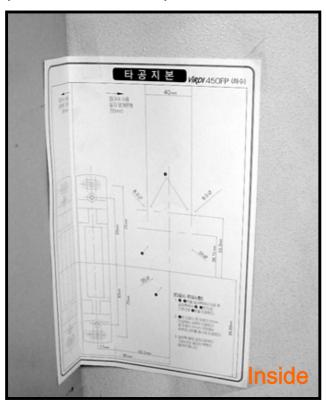

1. After check up the door's handle direction (left use or right use), Temporally adhere it at the door (Please adhere installation guide paper at the above position of 5cm from main door

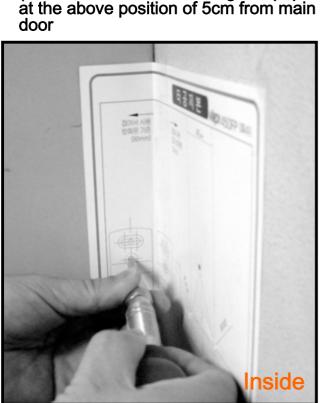

3. Marking 4points of lock bracket on the Installation guide paper

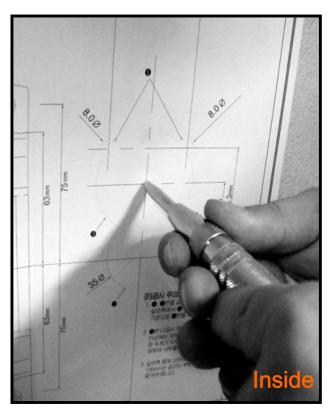

2. Marking 4points at the installation guide paper






4. Piercing the marked points on the door with piercing Tool

- 8mm Drill : Piercing from inside to Outside

- 35mm Drill : Piercing only inside

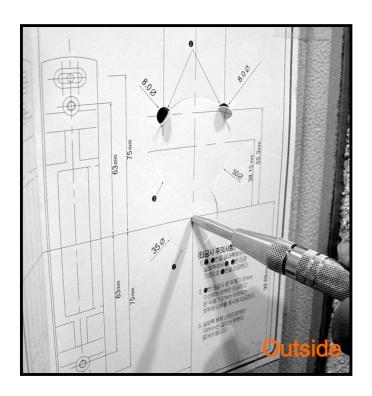


 At outside, After locating the 8mm hole with Installation guide paper's 8mm hole location, Punching & Marking 35mm's Hole & 50mm's Hole






 At first, Piercing 35mm's Hole at outside in the same location between Inside & Outside, then pierce 50mm's hole (outside only)






7. The picture is completed the hole making on the door







8. From the outside, Combine the front body and input the cable to the inside

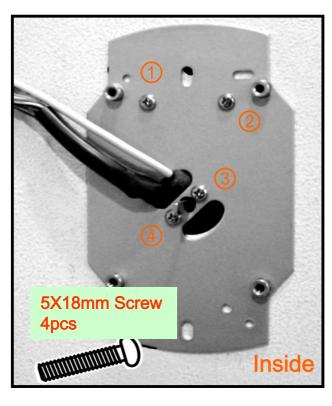

9. From Inside, Place a plate at the inside door, then, combine the plate and the front body with the screws (4pcs)

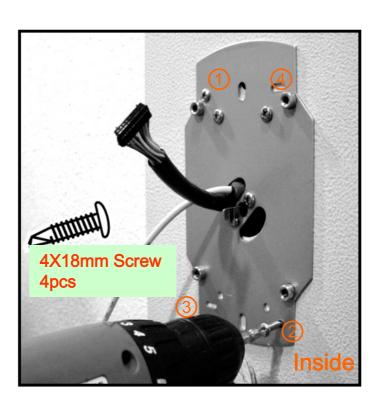

10. Fix up Inner plate and inside door with the screws (4pcs)

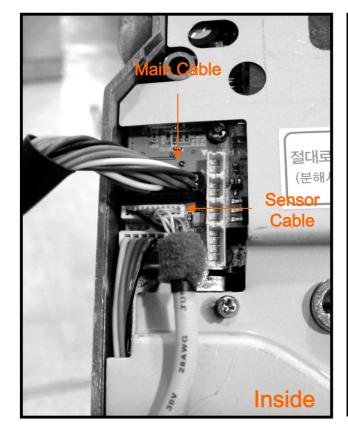


11. Connect Sensor cable & Main Cable





12. Fix up Inner lock body at inner plate with the screws (4pcs)



13. Fix up the lock bracket




14. Input the battery (AA Type 4pcs) with right position



15. Adhere the Caution sticker on the battery cover



16. Completed Installation (Outside)

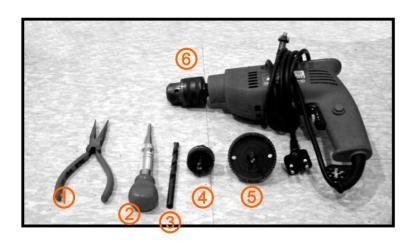

Installation Tool

- 1. Long-nose Pliers
- 2. Punching Tool
- 3. 8mm cutter blade
- 4. 35mm cutter blade
- 5. 50mm cutter blade
- 6. Electrical Drilling Machine